


964411 Swivel Installation Instructions

Use a 4mm allen wrench only. Use of an SAE allen wrench may damage screws.

Use high strength Red Threadlocker on threads.

Oil where indicated below.

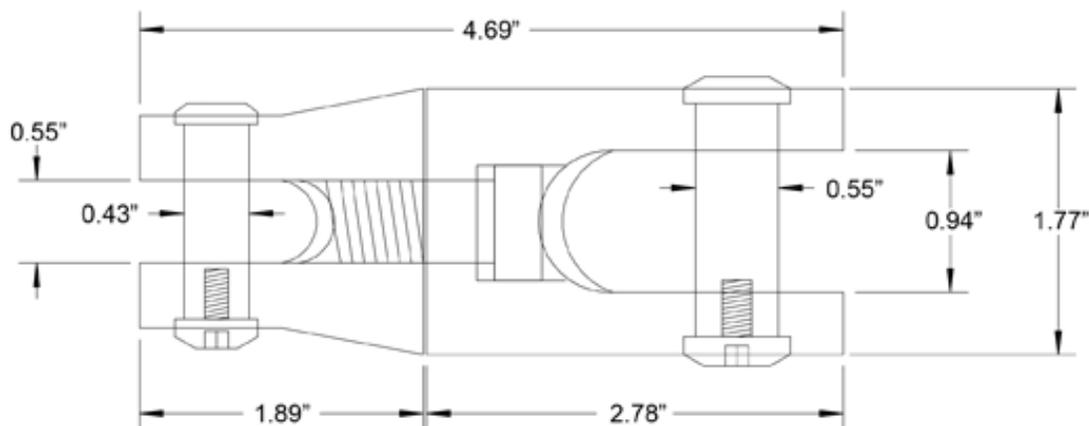

**THREAD
LOCK**

OIL

**THREAD
LOCK**

MAX KG = 6000

MAX LB = 13200

AISI 316L