


964412 Swivel Installation Instructions

Use a 5mm allen wrench only. Use of an SAE allen wrench may damage screws.

Use high strength Red Threadlocker on threads.

Oil where indicated below.

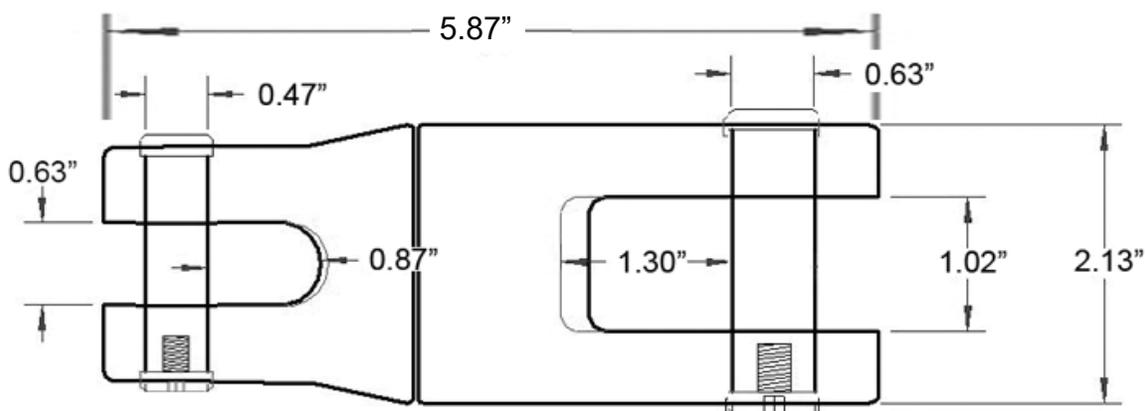

**THREAD
LOCK**

OIL

**THREAD
LOCK**

MAX KG = 7000

MAX LB = 15400

AISI 316L