


## 964420 Swivel Installation Instructions

Use a 6mm allen wrench only. Use of an SAE allen wrench may damage screws.

Use high strength Red Threadlocker on threads.

Oil where indicated below.

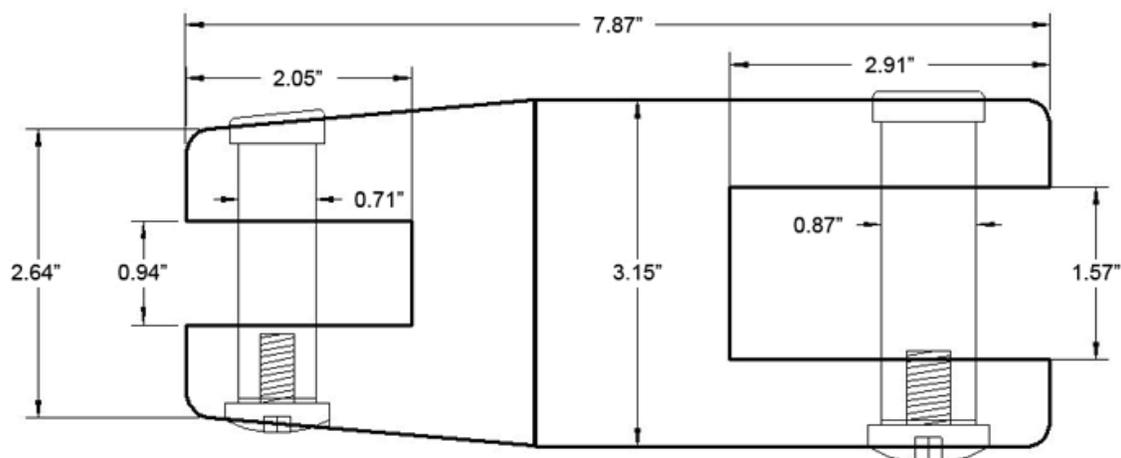

THREAD  
LOCK

OIL

THREAD  
LOCK

MAX KG = 24000

MAX LB = 52900

AISI 316L